
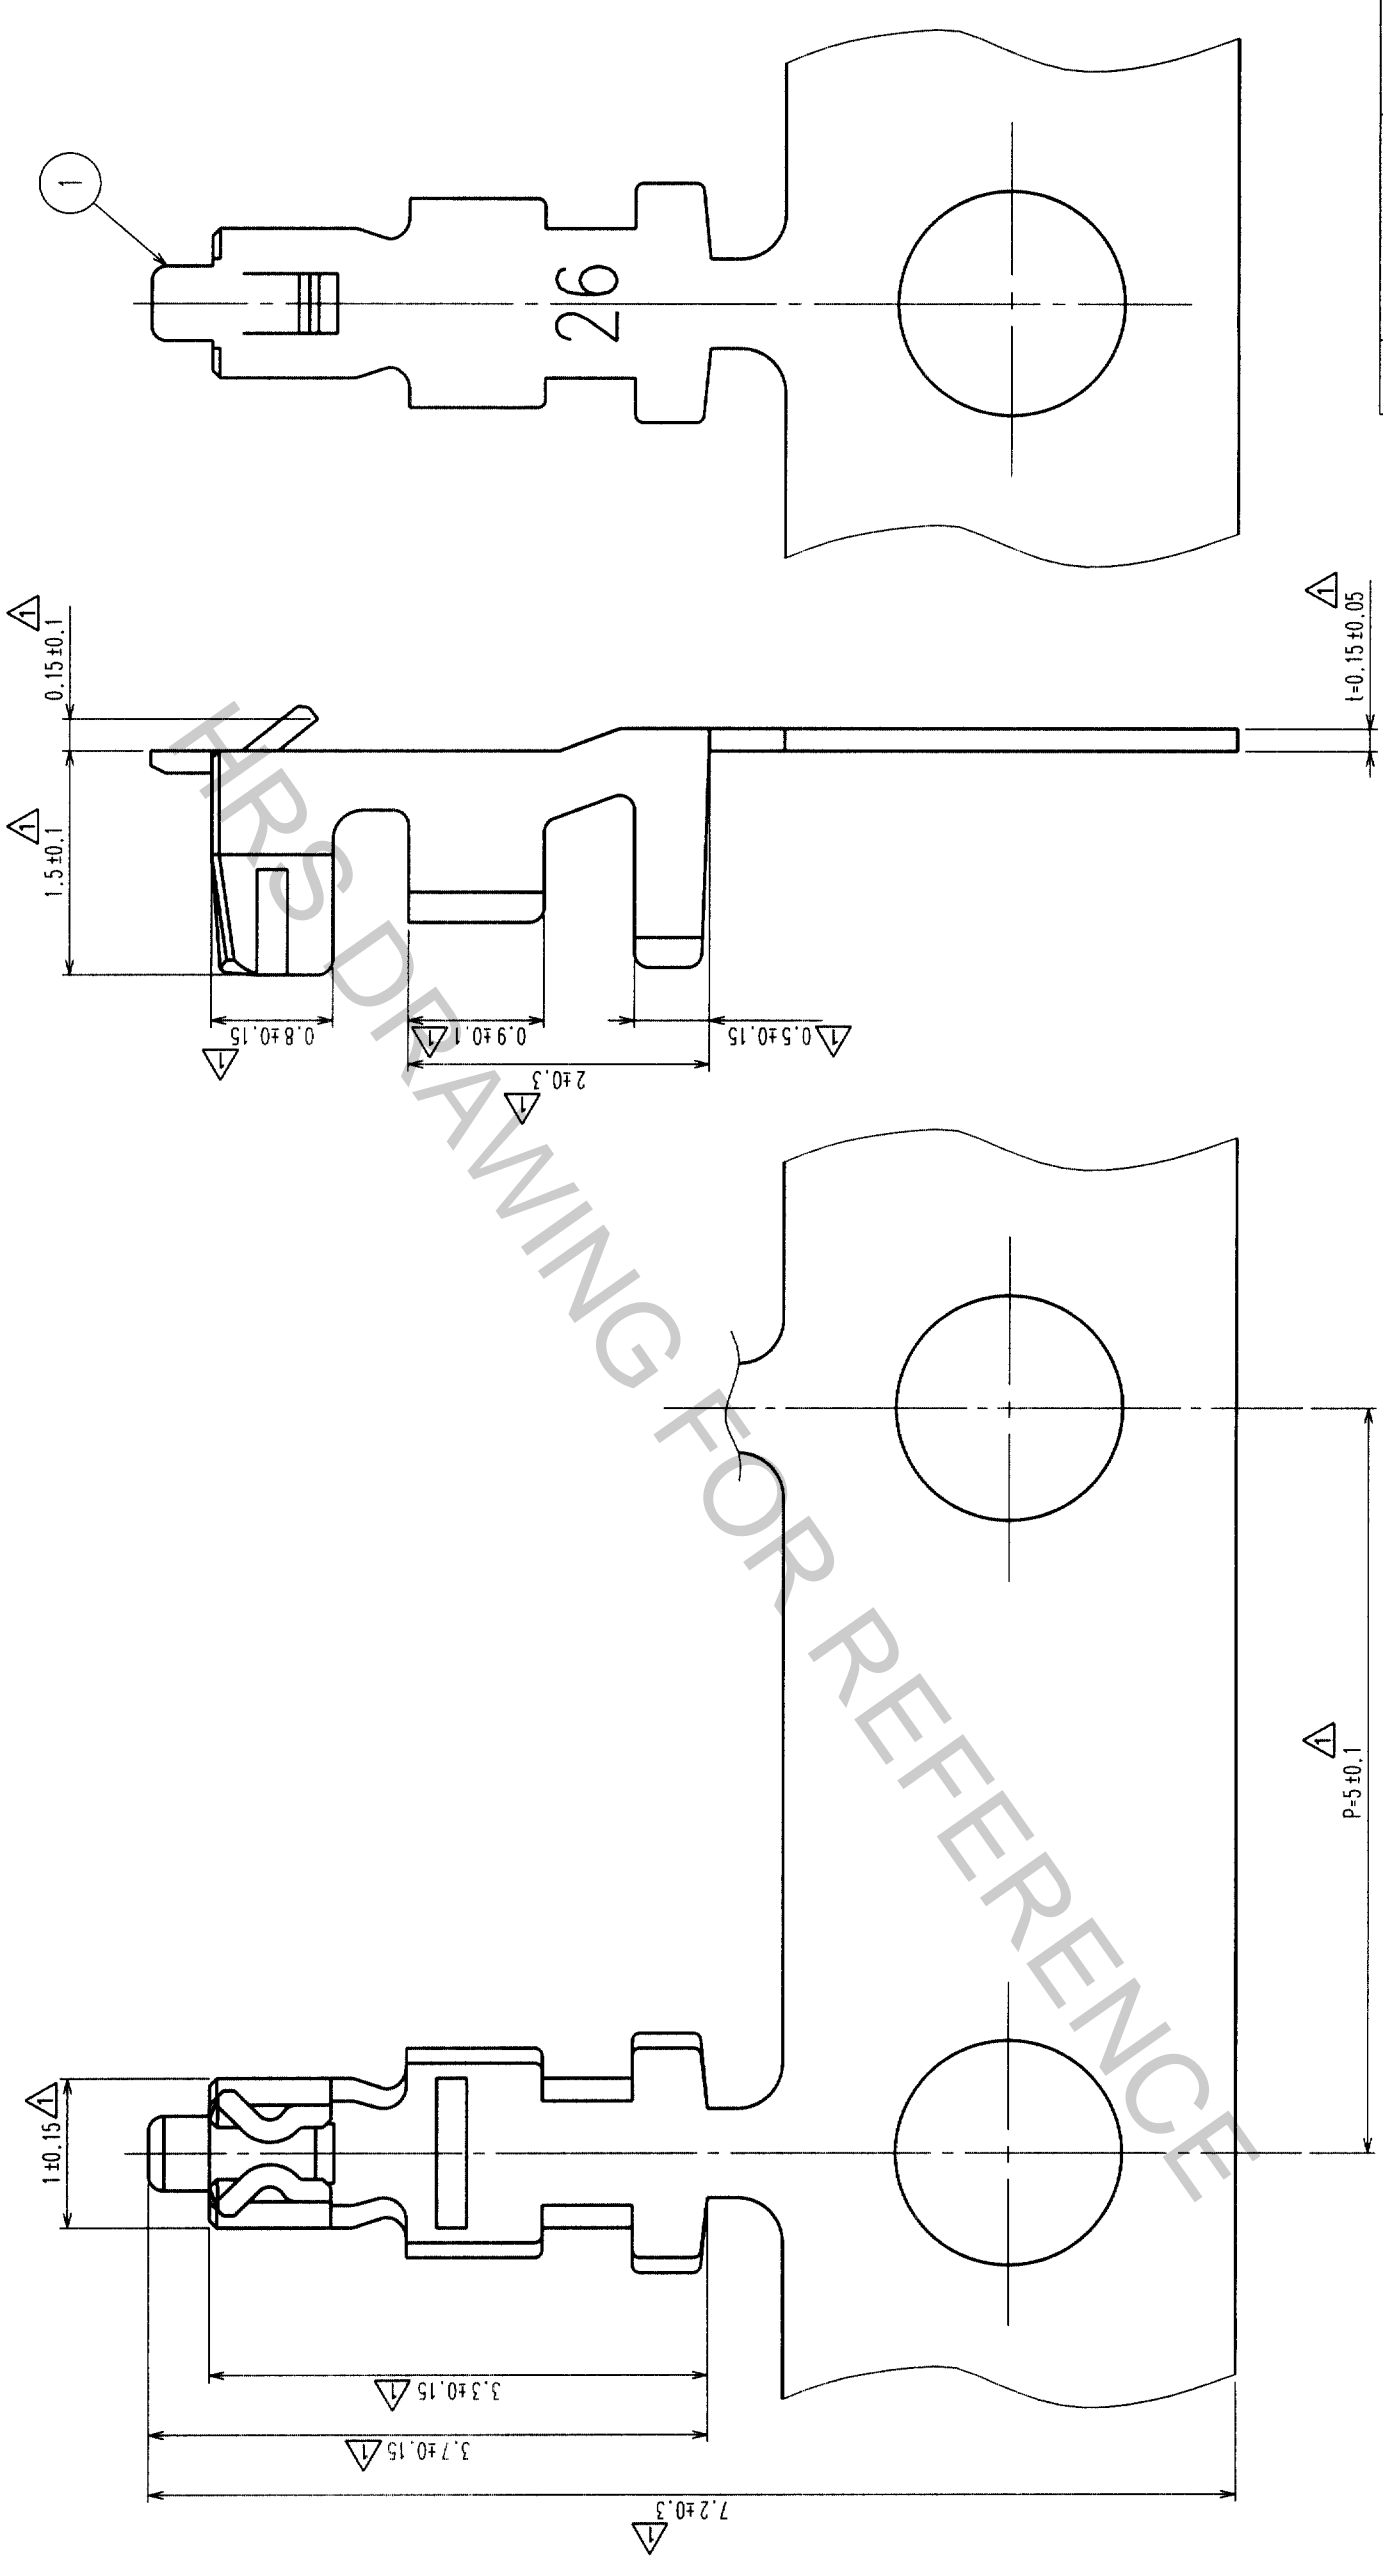


In case of consideration for using Automotive equipment/
device which demand high reliability, kindly contact our sales.

| NO. | REVISIONS | BY | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | DATE |
|-----|------------|------|--------------|-------|--------------------------|----|------|
| 17 | RE-H-03268 | I.Y. | K.A. 99.8.25 | | | | |
| | | | | | | | |
| | | | | | | | |



△ NOTES 1: APPLICABLE WIRE : 26 - 30 AWG
 JACKET DIAMETER : 1.0 mm MAX
 △ 2: 1 REEL 10000 CONTACTS

| NO. | MATERIAL | FINISH, REMARKS | FINISH, REMARKS | NO. | MATERIAL | FINISH, REMARKS |
|-----|-----------------|-----------------|-----------------|-----|----------|-----------------|
| 1 | PHOSPHOR BRONZE | TIN PLATED | | | | |

| CODE NO. (OLD) | DRAWN | DESIGNED | CHECKED | APPROVED | RELEASED |
|----------------|-----------|-----------|-----------|------------|----------|
| | T.Goi | I.Toshiro | K.Akiyama | M.Yamamoto | |
| | '94. 4.18 | '94. 4.19 | '94. 4.25 | '94. 4.25 | |

| | |
|--------------------------|--|
| SCALE 20 : 1 UNITS mm | DRAWING NO. EDC3-081857 PART NO. DF13-2630SCF |
|--------------------------|--|

| | |
|---------------------------|-----------------------|
| HIROSE ELECTRIC CO., LTD. | CODE NO. CL536-0300-5 |
|---------------------------|-----------------------|

| | |
|----|--|
| TO | |
|----|--|