
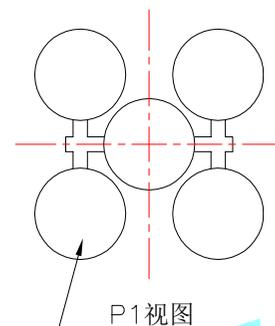
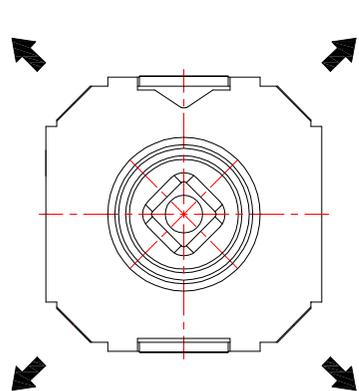





ROHS

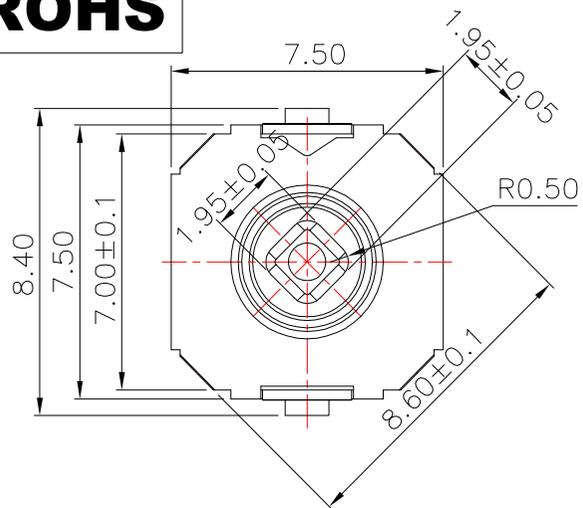

P1视图



Terminal	①	②	③	④	⑤	⑥
Direction						
↓		●			●	
↖	●				●	
↗				●	●	
↙			●		●	
↘					●	●

Circuit Diagram

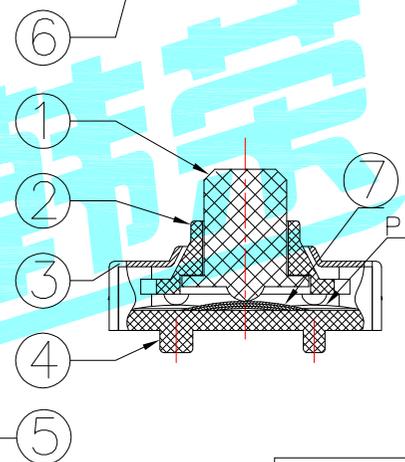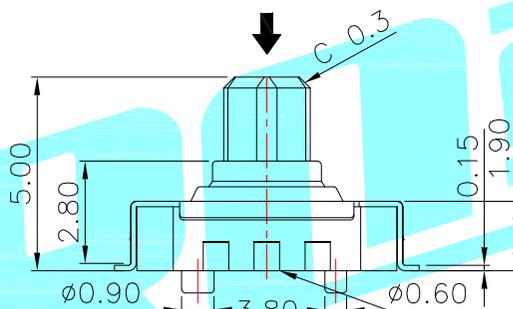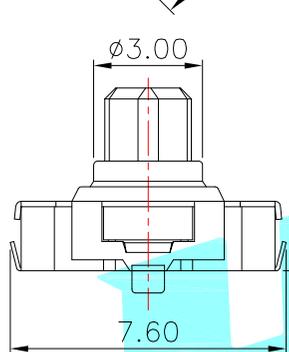

NOTE:
 Operating Force:
 lever portion: 170 ± 35 gf
 Push portion: 350gf or 250gf
 Travel:4-direction 5°±2°
 center push 0.20±0.1mm

Push portion	PART NO
350gf	K1-5203UA-06
250gf	K1-5203UA-06A

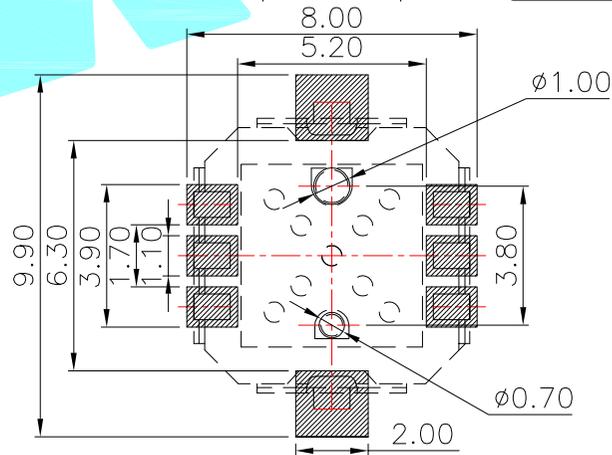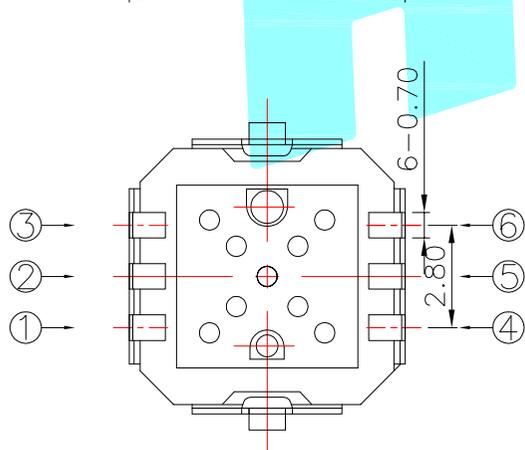

PCB Layout(Pattern Side)

⑦	Mylar	—	1	Natural	—	—
⑥	Contact 1	—	—	F.Ag/SUS	—	—
⑤	Terminal	—	6	Phosphor bronze	Plating silver	—
④	Base	—	1	LCP	Black	—
③	Cover	—	1	SUS	—	—
②	Axle sleeve	—	1	PPA	Black	—
①	Keystoke	—	1	PPA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		HRO 睿 ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2022.11.9		TITLE:	1.95*1.95高度5.0MM	
CHECKED				PART NO.		
APPROVALS				UNIT: mm	SCALE: 1:1	PROJ:
TOLERANCES ARE		30~以上	±0.30	ANGLE	DRAWING NO.	SHEET 1 OF 1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
			±2'			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—