

DGG OR DL PACKAGE

(TOP VIEW)

SCES092F-JANUARY 1997-REVISED OCTOBER 2004

FEATURES

- Member of the Texas Instruments Widebus™ Family
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Output Ports Have Equivalent 26- Ω Series **Resistors, So No External Resistors Are** Required
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)

DESCRIPTION/ORDERING INFORMATION

This 16-bit edge-triggered D-type flip-flop is designed for 1.65-V to 3.6-V V_{CC} operation.

The SN74ALVCH162374 is particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers. It can be used as two 8-bit flip-flops or one 16-bit flip-flop. On the positive transition of the clock (CLK) input, the Q outputs of the flip-flop take on the logic levels set up at the data (D) inputs.

The output-enable (OE) input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and the increased drive provide the capability to drive bus lines without need for interface or pullup components. OE does not affect internal operations of the flip-flop. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

	-			
1 0E	1	U	48	
1Q1	2		47	1D1
1Q2	3		46	1D2
GND [4		45	GND
1Q3	5		44] 1D3
1Q4 [6		43] 1D4
V _{CC} [7		42] ∨ _{cc}
1Q5 [8		41] 1D5
1Q6	9		40] 1D6
GND [10		39] GND
1Q7 [11		38	1D7
1Q8			37	1D8
2Q1 [13		36	2D1
2Q2 [14		35	2D2
GND [34	GND
2Q3	16		33	2D3
2Q4	17		32	2D4
V _{CC}			31	Vcc
2Q5			30	2D5
2Q6			29	2D6
GND [21		28	GND
2Q7	22		27	2D7
2Q8	23		26	2D8
2 <mark>0E</mark>	24		25	2CLK
	L			I

The outputs, which are designed to sink up to 12 mA, include equivalent 26Ω resistors to reduce overshoot and undershoot.

ORDERING INFORMATION

T _A	PACK	AGE ⁽¹⁾	ORDERABLE PART NUMBER	TOP-SIDE MARKING		
	SSOP - DL	Tube	SN74ALVCH162374DL			
-40°C to 85°C	330F - DL	Tape and reel	SN74ALVCH162374DLR	— ALVCH162374		
	TSSOP - DGG	Tape and reel	SN74ALVCH162374GR	ALVCH162374		

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet. Widebus is a trademark of Texas Instruments.

SCES092F-JANUARY 1997-REVISED OCTOBER 2004

TEXAS INSTRUMENTS www.ti.com

DESCRIPTION/ORDERING INFORMATION (CONTINUED)

To ensure the high-impedance state during power up or power down, \overline{OE} should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.


Active bus-hold circuitry holds unused or undriven inputs at a valid logic state. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended.

FUNCTION TABLE (each flip-flop)

			0011 01
OE	CLK	D	Q
L	\uparrow	Н	Н
L	\uparrow	L	L
L	H or L	Х	Q ₀
н	Х	Х	Z

SCES092F-JANUARY 1997-REVISED OCTOBER 2004




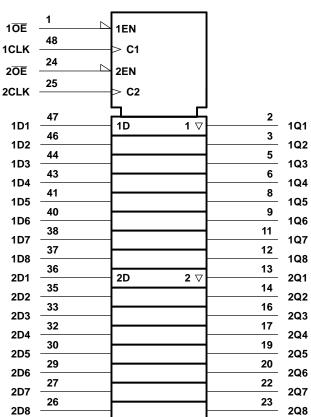

LOGIC SYMBOL⁽¹⁾

(1) This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

LOGIC DIAGRAM (POSITIVE LOGIC)

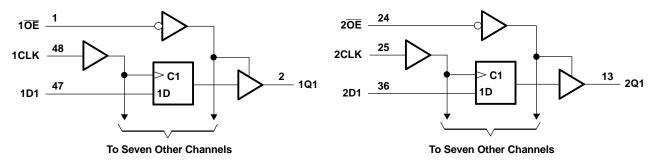

SCES092F-JANUARY 1997-REVISED OCTOBER 2004



ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT		
V _{CC}	Supply voltage range		-0.5	4.6	V		
VI	Input voltage range ⁽²⁾		-0.5	4.6	V		
Vo	Output voltage range ⁽²⁾⁽³⁾		-0.5	V _{CC} + 0.5	V		
I _{IK}	Input clamp current	V ₁ < 0		-50	mA		
I _{OK}	Output clamp current		-50	mA			
lo	Continuous output current	Continuous output current					
	Continuous current through each V_{CC} or GNE)		±100	mA		
0	Decline the result interval (4)	DGG package		89	°C/W		
θ_{JA}	Package thermal impedance ⁽⁴⁾	DL package		94			
T _{stg}	Storage temperature range	Storage temperature range					

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

(3) This value is limited to 4.6 V maximum.

(4) The package thermal impedance is calculated in accordance with JESD 51.

RECOMMENDED OPERATING CONDITIONS⁽¹⁾

			MIN	MAX	UNIT	
V _{CC}	Supply voltage		1.65	3.6	V	
		V _{CC} = 1.65 V to 1.95 V	$0.65 imes V_{CC}$			
V _{IH}	High-level input voltage	V_{CC} = 2.3 V to 2.7 V	1.7		V	
		$V_{CC} = 2.7 V \text{ to } 3.6 V$	2			
		V _{CC} = 1.65 V to 1.95 V		$0.35 \times V_{CC}$		
V _{IL}	Low-level input voltage	V_{CC} = 2.3 V to 2.7 V		0.7	V	
		$V_{CC} = 2.7 V \text{ to } 3.6 V$	0.8			
VI	Input voltage	L	0	V _{CC}	V	
Vo	Output voltage		0	V _{CC}	V	
		V _{CC} = 1.65 V		-2		
		V _{CC} = 2.3 V		-6		
I _{OH}	High-level output current	$V_{CC} = 2.7 V$		-8	mA	
		$V_{CC} = 3 V$		-12		
		V _{CC} = 1.65 V		2		
		V _{CC} = 2.3 V		6		
I _{OL}	Low-level output current	V _{CC} = 2.7 V		8	mA	
		$V_{CC} = 3 V$		12		
$\Delta t / \Delta v$	Input transition rise or fall rate	L		10	ns/V	
T _A	Operating free-air temperature		-40	85	°C	

 All unused control inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



SCES092F-JANUARY 1997-REVISED OCTOBER 2004

ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{cc}	MIN	TYP ⁽¹⁾	MAX	UNIT	
	I _{OH} = -100 μA	1.65 V to 3.6 V	V _{CC} - 0.2				
	I _{OH} = -2 mA	1.65 V	1.2				
	I _{OH} = -4 mA	2.3 V	1.9				
V _{OH}		2.3 V	1.7			V	
	I _{OH} = -6 mA	3 V	2.4				
V _{OL}	I _{OH} = -8 mA	2.7 V	2				
	I _{OH} = -12 mA	3 V	2				
	I _{OL} = 100 μA	1.65 V to 3.6 V			0.2		
	$I_{OL} = 2 \text{ mA}$	1.65 V			0.45		
	I _{OL} = 4 mA	2.3 V			0.4		
V _{OL}		2.3 V			0.55	V	
	I _{OL} = 6 mA	3 V			0.55		
	I _{OL} = 8 mA	2.7 V			0.6	.6	
	I _{OL} = 12 mA	3 V			0.8		
I _I	$V_{I} = V_{CC} \text{ or } GND$	3.6 V			±5	μA	
	V ₁ = 0.58 V	1.65 V	25				
	V ₁ = 1.07 V	1.65 V -25					
	V ₁ = 0.7 V	2.3 V	45				
I _{I(hold)}	V ₁ = 1.7 V	2.3 V	-45			μA	
	V ₁ = 0.8 V	3 V	75				
	V ₁ = 2 V	3 V	-75				
	$V_1 = 0$ to 3.6 V ⁽²⁾	3.6 V			±500		
l _{oz}	$V_{O} = V_{CC}$ or GND	3.6 V			±10	μA	
I _{CC}	$V_{I} = V_{CC}$ or GND, $I_{O} = 0$	3.6 V			40	μA	
Δl _{CC}	One input at V_{CC} - 0.6 V, Other inputs at V_{CC} or GND	3 V to 3.6 V			750	μA	
Control inputs		2.2.1/		3		- 5	
C _i Data inputs	$V_{I} = V_{CC} \text{ or } GND$	3.3 V		6		pF	
C _o Outputs	$V_0 = V_{CC}$ or GND	3.3 V		7		pF	

(1)

All typical values are at V_{CC} = 3.3 V, T_A = 25°C. This is the bus-hold maximum dynamic current. It is the minimum overdrive current required to switch the input from one state to (2) another.

TIMING REQUIREMENTS

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

		V _{CC} =	1.8 V	V_{CC} = 2.5 V ± 0.2 V		V _{CC} = 2.7 V		V_{CC} = 3.3 V ± 0.3 V		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
f _{clock}	Clock frequency		(1)		150		150		150	MHz
t _w	Pulse duration, CLK high or low	(1)		3.3		3.3		3.3		ns
t _{su}	Setup time, data before CLK [↑]	(1)		2.1		2.2		1.9		ns
t _h	Hold time, data after $CLK\uparrow$	(1)		0.6		0.5		0.5		ns

(1) This information was not available at the time of publication.

SCES092F-JANUARY 1997-REVISED OCTOBER 2004

TEXAS INSTRUMENTS www.ti.com

SWITCHING CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = 1	.8 V	V _{CC} = 2 ± 0.2	2.5 V V	V _{CC} = 2	2.7 V	V _{CC} = 3 ± 0.3	8.3 V V	UNIT
		(001201)	MIN	TYP	MIN	MAX	MIN	MAX	MIN	МАХ	
f _{max}			(1)		150		150		150		MHz
t _{pd}	CLK	Q		(1)	1	5.4		5.4	1	4.6	ns
t _{en}	OE	Q		(1)	1	6.5		6.4	1	5.2	ns
t _{dis}	OE	Q		(1)	1	5.6		5	1.2	4.5	ns

(1) This information was not available at the time of publication.

OPERATING CHARACTERISTICS


 $T_A = 25^{\circ}C$

	PARAMETER		TEST CONDITIONS	V _{CC} = 1.8 V TYP	V _{CC} = 2.5 V TYP	V _{CC} = 3.3 V TYP	UNIT	
C	Dower dissipation consultance	Outputs enabled	C = 0.5 = 10 MHz	(1)	28	31	۶F	
Cpd	Power dissipation capacitance	Outputs disabled	$C_{L} = 0, f = 10 \text{ MHz}$	(1)	10	11	рг	

(1) This information was not available at the time of publication.


SCES092F-JANUARY 1997-REVISED OCTOBER 2004

PARAMETER MEASUREMENT INFORMATION

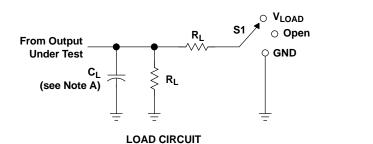


TEST	S1
t _{pd}	Open
t _{PLZ} /t _{PZL}	V _{LOAD}
t _{PHZ} /t _{PZH}	GND

Vee	IN	PUT	V	v	<u>^</u>	Р	v	
V _{CC}	CVI tr/		V _M	V _{LOAD}	C∟	RL	V_{Δ}	
1.8 V \pm 0.15 V	V _{CC}	≤ 2 ns	V _{CC} /2	$2 \times V_{CC}$	30 pF	1 k Ω	0.15 V	
2.5 V \pm 0.2 V	V _{CC}	≤2 ns	V _{CC} /2	$2 \times V_{CC}$	30 pF	500 Ω	0.15 V	
2.7 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V	
3.3 V \pm 0.3 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V	

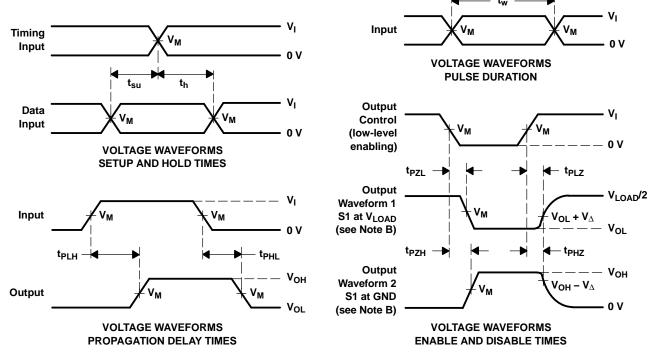

NOTES: A. C_L includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_Ω = 50 Ω.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- F. t_{PZL} and t_{PZH} are the same as t_{en} .
- G. t_{PLH} and t_{PHL} are the same as t_{pd} .
- H. All parameters and waveforms are not applicable to all devices.





10-Dec-2020

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
							(6)				
SN74ALVCH162374DL	ACTIVE	SSOP	DL	48	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH162374	Samples
SN74ALVCH162374DLR	ACTIVE	SSOP	DL	48	1000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH162374	Samples
SN74ALVCH162374GR	ACTIVE	TSSOP	DGG	48	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH162374	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



www.ti.com

PACKAGE OPTION ADDENDUM

10-Dec-2020

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

Texas Instruments

www.ti.com

TAPE AND REEL INFORMATION





QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




*All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVCH162374DLR	SSOP	DL	48	1000	330.0	32.4	11.35	16.2	3.1	16.0	32.0	Q1
SN74ALVCH162374GR	TSSOP	DGG	48	2000	330.0	24.4	8.6	13.0	1.8	12.0	24.0	Q1



www.ti.com

PACKAGE MATERIALS INFORMATION

5-Jan-2022

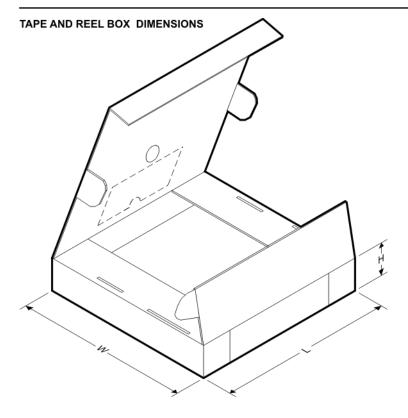

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVCH162374DLR	SSOP	DL	48	1000	367.0	367.0	55.0
SN74ALVCH162374GR	TSSOP	DGG	48	2000	367.0	367.0	45.0



www.ti.com

5-Jan-2022

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	Τ (μm)	B (mm)
SN74ALVCH162374DL	DL	SSOP	48	25	473.7	14.24	5110	7.87

DL (R-PDSO-G48)

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.



PACKAGE OUTLINE

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 This drawing is subject to change without notice.
 This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not

- exceed 0.15 mm per side. 4. Reference JEDEC registration MO-153.



DGG0048A

DGG0048A

EXAMPLE BOARD LAYOUT

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



DGG0048A

EXAMPLE STENCIL DESIGN

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate

design recommendations. 8. Board assembly site may have different recommendations for stencil design.



MECHANICAL DATA

MTSS003D - JANUARY 1995 - REVISED JANUARY 1998

DGG (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

48 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-153



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022, Texas Instruments Incorporated